

G3VM-41PR□/51PR

MOS FET Relays USOP package with Low Output Capacitance and ON Resistance type (Low C × R)

USOP Package with Low Output Capacitance and ON Resistance

- Load voltage 40V/50V



NEW


Note: The actual product is marked differently from the image shown here.

⚠ Refer to "Common Precautions".

Application Examples

- Semiconductor test equipment
- Communication equipment
- Test & measurement equipment
- Data loggers

Package (Unit : mm, Average)



Note: The actual product is marked differently from the image shown here.

Model Number Legend

G3VM-□□□□□
1 2 3 4 5

- 1. Load Voltage**
4: 40V
5: 50V
- 2. Contact form**
1: 1a (SPST-NO)
- 3. Package type**
P: USOP 4 pin
- 4. Additional functions**
R: Low On-resistance
- 5. Other informations**
When specifications overlap, serial code is added in the recorded order.

Ordering Information

Package type	Contact form	Terminals	Load voltage (peak value) *	Continuous load current (peak value) *	Packing/Tape cut		Packing/Tape & reel	
					Model	Minimum package quantity	Model	Minimum package quantity
USOP4	1a (SPST-NO)	Surface-mounting Terminals	40V	100mA	G3VM-41PR12	1 pc.	G3VM-41PR12(TR05)	500 pcs.
				120mA	G3VM-41PR6		G3VM-41PR6(TR05)	
				140mA	G3VM-41PR10		G3VM-41PR10(TR05)	
				300mA	G3VM-41PR11		G3VM-41PR11(TR05)	
				300mA	G3VM-41PR5		G3VM-41PR5(TR05)	
				300mA	G3VM-51PR		G3VM-51PR(TR05)	
			50V	300mA				

Note: When ordering tape packing, add "(TR05)" (500pcs/reel) to the model number.
Ask your OMRON representative for orders under 500 pcs. We can supply products with the tape already cut.
Tape-cut USOPs are packaged without humidity resistance. Use manual soldering to mount them.
Refer to common precautions.

* The AC peak and DC value are given for the load voltage and continuous load current.

Absolute Maximum Ratings (Ta = 25°C)

Item		Symbol	G3VM-41PR12	G3VM-41PR6	G3VM-41PR10	G3VM-41PR11	G3VM-41PR5	G3VM-51PR	Unit	Measurement conditions	
Input	LED forward current	IF	50							mA	
	LED forward current reduction rate	ΔIF/°C	-0.5							mA/°C	Ta≥25°C
	LED reverse voltage	VR	5							V	
	Connection temperature	TJ	125							°C	
Output	Load voltage (AC peak/DC)	V _{OFF}	40					50		V	
	Continuous load current (AC peak/DC)	I _o	100	120	140		300		mA		
	ON current reduction rate	ΔI _o /°C	-1.0	-1.2	-1.4		-3		mA/°C	Ta≥25°C	
	Pulse ON current	I _{op}	300	360	420		900		mA	t=100ms, Duty=1/10	
	Connection temperature	TJ	125							°C	
Dielectric strength between I/O *		V _{I-O}	500							Vrms	AC for 1 min
Ambient operating temperature		Ta	-40~+85							°C	With no icing or condensation
Ambient storage temperature		Tstg	-40~+125							°C	
Soldering temperature		-	260							°C	10s

* The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.


USOP

G3VM-41PR□/51PR


■Electrical Characteristics (Ta = 25°C)

Item		Symbol	G3VM-41PR12	G3VM-41PR6	G3VM-41PR10	G3VM-41PR11	G3VM-41PR5	G3VM-51PR	Unit	Measurement conditions	
Input	LED forward voltage	Minimum	1.0						V	IF=10mA	
		Typical	1.15								
		Maximum	1.3								
	Reverse current	IR	Maximum 10						μA	VR=5V	
	Capacity between terminals	CT	Typical 15						pF	V=0, f=1MHz	
Trigger LED forward current	IFT	Typical	1.0	0.6	0.5	1.0	0.6	0.5	mA	Io=100mA	
		Maximum	3								
Release LED forward current	IFC	Minimum	0.1					0.2	mA	Ioff=10μA	
Output	Maximum resistance with output ON	Typical	15	10	12	7	1		Ω	IF=5mA, t<1s Io=Continuous load current ratings	
		Maximum	20	15	14	10	1.5				
	Current leakage when the relay is open	Ileak	Maximum 1		0.2		1			nA	Voff=Load voltage ratings
	Capacity between terminals	COFF	Typical 0.3		1	0.45	0.7	10	12	pF	V=0, f=100MHz, t<1s
Maximum	0.6		2	0.8	1.3	14	—				
Capacity between I/O terminals	CI-O	Typical 0.4								pF	f=1MHz, Vs=0V
Insulation resistance between I/O terminals	RI-O	Minimum	1000						MΩ	VI-O=500VDC, RoH≤60%	
		Typical	10 ⁹								
Turn-ON time	ton	Typical	0.04	0.05	0.03	0.04	0.2		ms	IF=5mA, RL=200Ω, VDD=20V *1	
		Maximum	0.2				0.5				
Turn-OFF time	toff	Typical	0.12	0.16	0.2	0.14	0.2	0.1			
		Maximum	0.2	0.3		0.2	0.3	0.4			
Equivalent rise time	ERT	Typical	—						40	ps	IF=5mA, VDD=0.25V, Tr(in)=25ps *2
		Maximum	—						90		

*1. Turn-ON and Turn-OFF Times



*2. Equivalent Rise Time

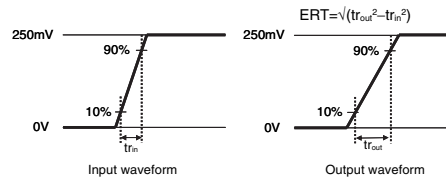

■Recommended Operating Conditions


For usage with high reliability, Recommended Operation Conditions is a measure that takes into account the derating of Absolute Maximum Ratings and Electrical Characteristics.

Each item on this list is an independent condition, so it is not simultaneously satisfy several conditions.


Item	Symbol	Maximum	G3VM-41PR12	G3VM-41PR6	G3VM-41PR10	G3VM-41PR11	G3VM-41PR5	G3VM-51PR	Unit	
Load voltage (AC peak/DC)	VDD	Maximum	32						40	V
Operating LED forward current	IF	Minimum	5						mA	
		Typical	7.5							
		Maximum	20							
Continuous load current (AC peak/DC)	Io	Maximum	100	120		140	300			
Ambient operating temperature	Ta	Minimum	-20						°C	
		Maximum	65							

Engineering Data


LED forward current vs. Ambient temperature



Continuous load current vs. Ambient temperature

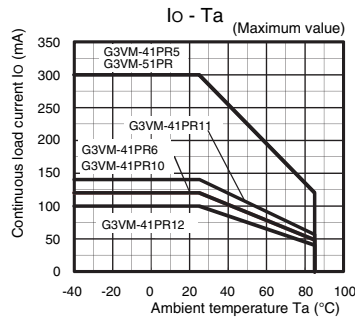


LED forward current vs. LED forward voltage

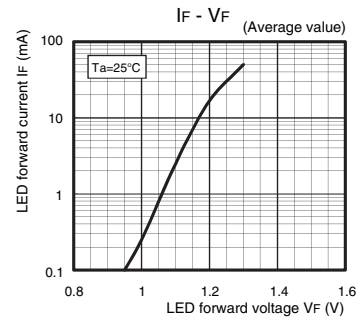


Continuous load current vs. On-state voltage


G3VM-41PR5/41PR6

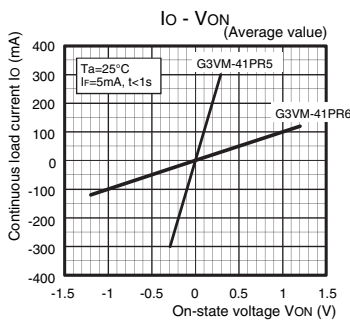

G3VM-41PR10/41PR11/41PR12/51PR




On-state resistance vs. Ambient temperature

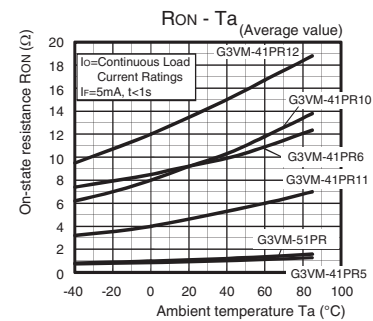


Trigger LED forward current vs. Ambient temperature

G3VM-41PR5/41PR6

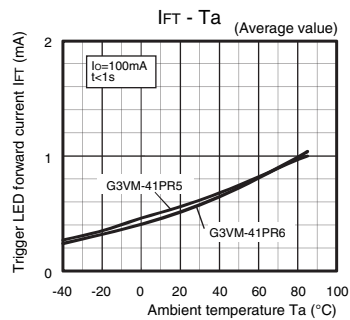


G3VM-41PR10/41PR11/41PR12/51PR

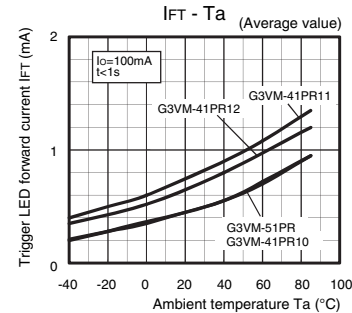


Turn ON, Turn OFF time vs. LED forward current


G3VM-41PR5/41PR6



G3VM-41PR10/41PR11/41PR12

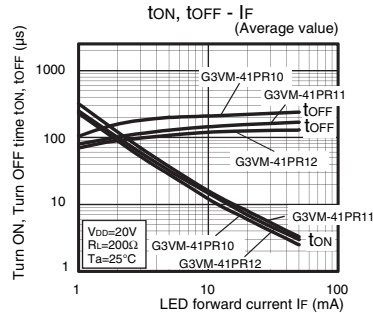


G3VM-51PR

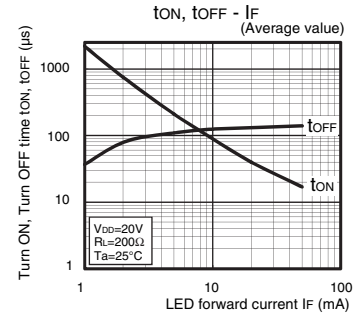


Engineering Data


Turn ON, Turn OFF time vs. Ambient temperature G3VM-41PR5/41PR6

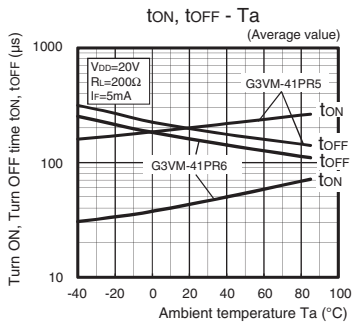


G3VM-41PR10/41PR11/41PR12

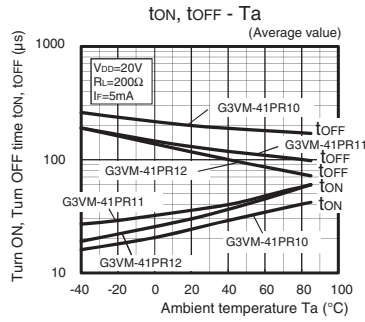

G3VM-51PR

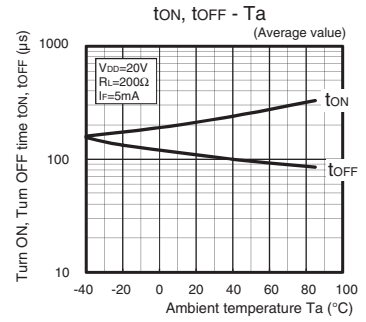


Output terminal capacitance vs. Load voltage




Current leakage vs. Load voltage

G3VM-41PR5/41PR6

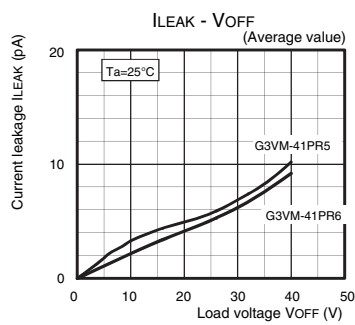


G3VM-41PR10/41PR11/41PR12/51PR

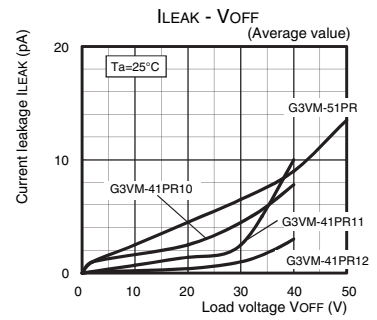

■Appearance / Terminal Arrangement / Internal Connections

■Appearance


USOP (Ultra Small Outline Package)
USOP4 pin



* Actual model name marking for each model

Model	Marking
G3VM-41PR12	4PC
G3VM-41PR6	4P6
G3VM-41PR10	4PA
G3VM-41PR11	4PB
G3VM-41PR5	4P5
G3VM-51PR	5P0

■Terminal Arrangement/Internal Connections (Top View)





Note. The actual product is marked differently from the image shown here.

■Dimensions (Unit: mm)

Surface-mounting Terminals


Weight: 0.03g



Unless otherwise specified, the dimensional tolerance is ± 0.2 mm.

Actual Mounting Pad Dimensions

(Recommended Value, Top View)



Unless otherwise specified, the dimensional tolerance is ± 0.2 mm.

Note: The actual product is marked differently from the image shown here.

■Approved Standards

UL recognized

Approved Standards	Contact form	File No.
UL recognized	1a (SPST-NO)	E80555

■Safety Precautions

- Refer to "Common Precautions" for all G3VM models.

Please check each region's Terms & Conditions by region website.

OMRON Corporation

Device & Module Solutions Company

Regional Contact

Americas
<https://components.omron.com/us>
Asia-Pacific
<https://components.omron.com/ap>
Korea
<https://components.omron.com/kr>

Europe
<https://components.omron.com/eu>
China
<https://components.omron.com.cn>
Japan
<https://components.omron.com/jp>