

# G3VM-21PR

MOS FET Relays USOP package with Low Output Capacitance and ON Resistance type (Low C × R)

## USOP Package with Low Output Capacitance and ON Resistance

- Load voltage 20V




Refer to "Common Precautions".

Note: The actual product is marked differently from the image shown here.

### ■ Application Examples

- Semiconductor test equipment
- Test & measurement equipment
- Communication equipment
- Data loggers

### ■ Package (Unit : mm, Average)



Note: The actual product is marked differently from the image shown here.

### ■ Model Number Legend

G3VM-□ □ □ □ □  
1 2 3 4 5

- |                                    |   |   |
|------------------------------------|---|---|
| 1. Load Voltage<br>2: 20V          | 3. Package type<br>P: USOP 4 pin                | 5. Other informations<br>When specifications overlap, serial code is added in the recorded order. |
| 2. Contact form<br>1: 1a (SPST-NO) | 4. Additional functions<br>R: Low On-resistance |   |

### ■ Ordering Information

Package type	Contact form	Terminals	Load voltage (peak value) *	Continuous load current (peak value) *	Packing/Tape cut		Packing/Tape & reel	
					Model	Minimum package quantity	Model	Minimum package quantity
USOP4	1a (SPST-NO)	Surface-mounting Terminals	20V	200mA 450mA 900mA	G3VM-21PR10 G3VM-21PR1 G3VM-21PR11	1 pc.	G3VM-21PR10(TR05) G3VM-21PR11(TR05) G3VM-21PR11(TR05)	500 pcs.

Note: When ordering tape packing, add "(TR05)" (500pcs/reel) to the model number.

Ask your OMRON representative for orders under 500 pcs. We can supply products with the tape already cut.

Tape-cut USOPs are packaged without humidity resistance. Use manual soldering to mount them.

Refer to common precautions.

\* The AC peak and DC value are given for the load voltage and continuous load current.

### ■ Absolute Maximum Ratings (Ta = 25°C)


Item	Symbol	G3VM-21PR10		G3VM-21PR1		G3VM-21PR11		Unit	Measurement conditions
Input	LED forward current	I <sub>F</sub>		50				mA	
	LED forward current reduction rate	ΔI <sub>F</sub> /°C		-0.5				mA/°C	Ta≥25°C
	LED reverse voltage	V <sub>R</sub>		5				V	
	Connection temperature	T <sub>J</sub>		125				°C	
Output	Load voltage (AC peak/DC)	V <sub>OFF</sub>		20				V	
	Continuous load current (AC peak/DC)	I <sub>O</sub>	200	450	900			mA	
	ON current reduction rate	ΔI <sub>O</sub> /°C	-2.0	-4.5	-12			mA/°C	Ta≥25°C
	Pulse ON current	I <sub>OP</sub>	600	1,300	2,700			mA	t=100ms, Duty=1/10
	Connection temperature	T <sub>J</sub>		125				°C	
	Dielectric strength between I/O *	V <sub>I-O</sub>		500				Vrms	AC for 1 min
Ambient operating temperature		T <sub>a</sub>		-40~+85				°C	
Ambient storage temperature		T <sub>Stg</sub>		-40~+125				°C	With no icing or condensation
Soldering temperature		-		260				°C	10s

\* The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.


## ■Electrical Characteristics (Ta = 25°C)

Item	Symbol	G3VM-21PR10	G3VM-21PR1	G3VM-21PR11	Unit	Measurement conditions
Input LED forward voltage	VF	Minimum	1.0		V	I <sub>F</sub> =10mA
		Typical	1.15			
		Maximum	1.3			
Reverse current	I <sub>R</sub>	Maximum	10		μA	V <sub>R</sub> =5V
Capacity between terminals	C <sub>T</sub>	Typical	15		pF	V=0, f=1MHz
Trigger LED forward current	I <sub>FT</sub>	Typical	1	0.6	mA	I <sub>O</sub> =100mA
		Maximum	3			
Release LED forward current	I <sub>FC</sub>	Minimum	0.1		mA	I <sub>OFF</sub> =10μA
Output Maximum resistance with output ON	R <sub>ON</sub>	Typical	3	0.6	Ω	I <sub>F</sub> =5mA, t<1s I <sub>O</sub> =Continuous load current ratings
		Maximum	5	1.2		
Current leakage when the relay is open	I <sub>LEAK</sub>	Typical		1	nA	V <sub>OFF</sub> =20V
Capacity between terminals	C <sub>OFF</sub>	Typical	0.8	5	pF	V=0, f=100MHz
		Maximum	1.1	12		
Capacity between I/O terminals	C <sub>I-O</sub>	Typical		0.4	pF	f=1MHz, V <sub>S</sub> =0V
Insulation resistance between I/O terminals	R <sub>I-O</sub>	Minimum		1000	MΩ	V <sub>I-O</sub> =500VDC, RoH≤60%
		Typical		10 <sup>8</sup>		
Turn-ON time	t <sub>ON</sub>	Typical	0.04	0.2	ms	I <sub>F</sub> =5mA, R <sub>L</sub> =200Ω, V <sub>D</sub> =10V *1
		Maximum	0.2	0.5		
Turn-OFF time	t <sub>OFF</sub>	Typical	0.13	0.2		
		Maximum	0.2	0.5		
Equivalent rise time	ERT	Typical	—	40	ms	I <sub>F</sub> =5mA, V <sub>D</sub> =0.25V, Tr(in)=25ps *2
		Maximum	—	90		

\*1. Turn-ON and Turn-OFF Times

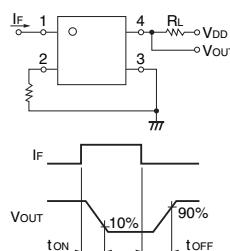

\*2. Equivalent Rise Time

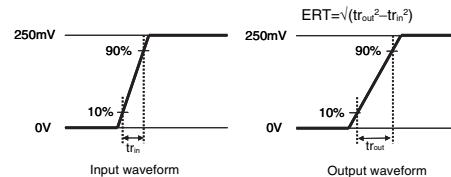

## ■Recommended Operating Conditions

For usage with high reliability, Recommended Operation Conditions is a measure that takes into account the derating of Absolute Maximum Ratings and Electrical Characteristics.


Each item on this list is an independent condition, so it is not simultaneously satisfy several conditions.

Item	Symbol	G3VM-21PR10	G3VM-21PR1	G3VM-21PR11	Unit
Load voltage (AC peak/DC)	V <sub>D</sub>	Maximum	16		V
Operating LED forward current	I <sub>F</sub>	Minimum	5		mA
		Typical	7.5		
		Maximum	20		
Continuous load current (AC peak/DC)	I <sub>O</sub>	Maximum	200	450	900
Ambient operating temperature	Ta	Minimum	—20		°C
		Maximum	65		


U  
S  
O  
PG  
3  
V  
M  
I  
2  
1  
P  
R

### ■Engineering Data


● LED forward current vs.  
Ambient temperature

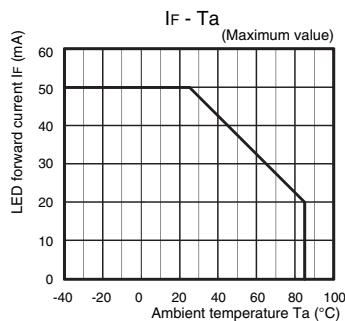

● Continuous load current vs.  
On-state voltage

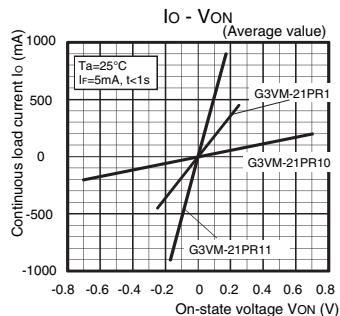


● Trigger LED forward current vs.  
Ambient temperature

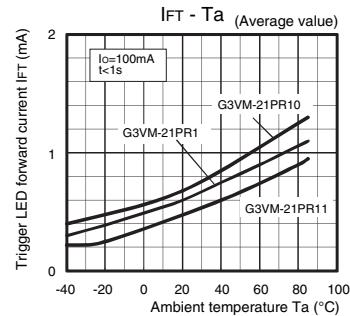


● Turn ON, Turn OFF time vs.  
Ambient temperature


G3VM-21PR1/21PR10

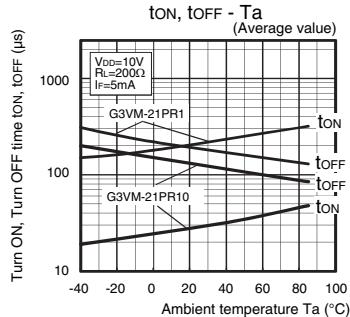

● Output terminal capacitance  
vs. Load voltage

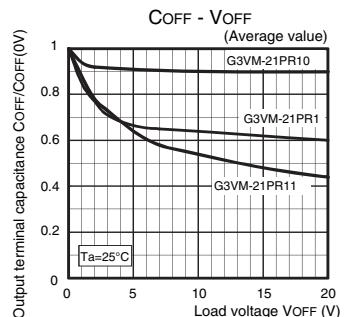


● Continuous load current vs.  
Ambient temperature

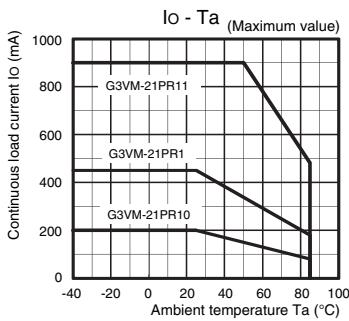


● On-state resistance vs.  
Ambient temperature

G3VM-21PR1/21PR11

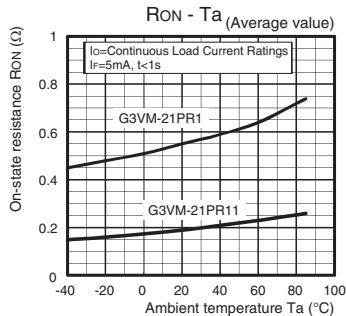


● Turn ON, Turn OFF time vs.  
LED forward current


G3VM-21PR1/21PR10

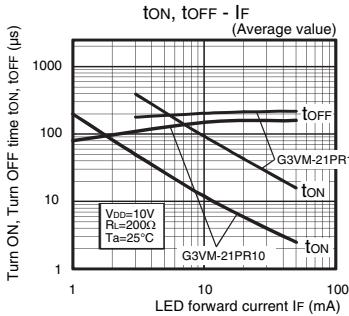


G3VM-21PR11

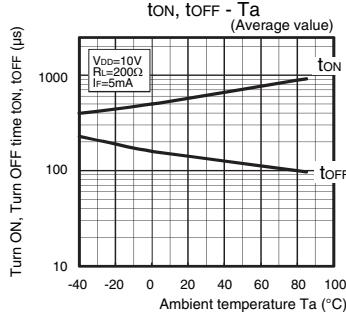


● LED forward current vs.  
LED forward voltage

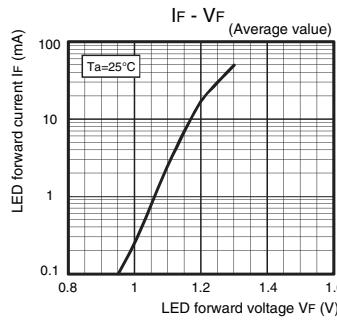


G3VM-21PR10

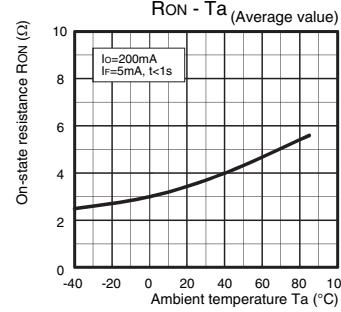

G3VM-21PR11

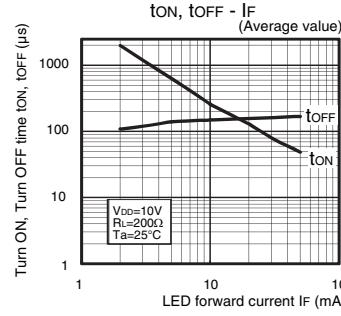

● Current leakage vs.  
Load voltage

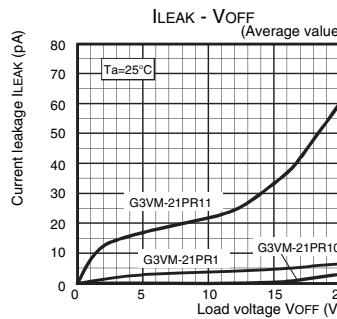


## ■Appearance / Terminal Arrangement / Internal Connections

### ■Appearance

USOP (Ultra Small Outline Package)


USOP4 pin

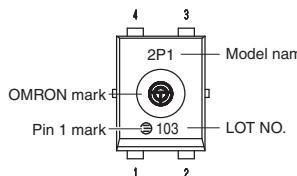

\* Actual model name marking for each model

Model	Marking
G3VM-21PR10	2PA
G3VM-21PR1	2P1
G3VM-21PR11	2PB

### ■Terminal Arrangement/Internal Connections (Top View)







Note: The actual product is marked differently from the image shown here.

## ■Dimensions (Unit: mm)

### Surface-mounting Terminals


Weight: 0.03g



Unless otherwise specified, the dimensional tolerance is ± 0.2 mm.

### Actual Mounting Pad Dimensions

(Recommended Value, Top View)



Unless otherwise specified, the dimensional tolerance is ± 0.2 mm.

Note: The actual product is marked differently from the image shown here.

## ■Approved Standards

UL recognized

Approved Standards	Contact form	File No.
UL recognized	1a (SPST-NO)	E80555

U  
S  
O  
P

## ■Safety Precautions

- Refer to "Common Precautions" for all G3VM models.

G  
3  
V  
M  
I  
2  
1  
P  
R

Please check each region's Terms & Conditions by region website.

**OMRON Corporation**  
Device & Module Solutions Company

### Regional Contact

#### Americas

<https://components.omron.com/us>

#### Asia-Pacific

<https://components.omron.com/ap>

#### Korea

<https://components.omron.com/kr>

#### Europe

<https://components.omron.com/eu>

#### China

<https://components.omron.com.cn>

#### Japan

<https://components.omron.com/jp>