


G3VM-6□G□/61VY□

MOS FET Relays SOP 4-pin, General-purpose Type

General-purpose MOS FET Relays in SOP 4-pin packages for a wide range of applications

- Contact form: 1a (SPST-NO) or 1b (SPST-NC)
- Load voltage: 60 V

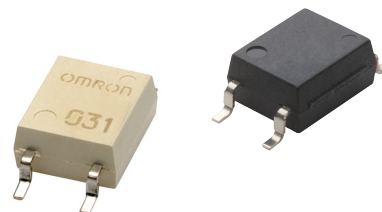

Note: The actual product is marked differently from the image shown here.


Application Examples

- Semiconductor test equipment
- Test & Measurement equipment
- Communication equipment
- Security equipment
- Industrial equipment
- Power circuit
- Amusement equipment

Package (Unit : mm, Average)

SOP 4-pin

Special SOP 4-pin

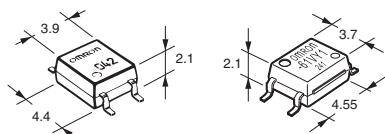

Note: The actual product is marked differently from the image shown here.

Model Number Legend

G3VM-□□□□□
1 2 3 4 5

1. Load voltage

6: 60 V

2. Contact form

- 1: 1a (SPST-NO)
- 3: 1b (SPST-NC)

3. Package

- G: SOP 4-pin
- V: Special SOP 4-pin

4. Additional functions

- None: Dielectric strength between I/O 1500 V
- Y: Dielectric strength between I/O 3750 V

5. Other informations

When specifications overlap, serial code is added in the recorded order.

Ordering Information

Package	Contact form	Terminals	Load voltage (peak value) *	Continuous load current (peak value) *	Stick packaging		Tape packaging	
					Model	Minimum package quantity	Model	Minimum package quantity
SOP4	1a (SPST-NO)	Surface-mounting Terminals	60 V	400 mA	G3VM-61G2	100 pcs.	G3VM-61G2(TR)	2500 pcs.
					G3VM-61G3		G3VM-61G3(TR)	
Special SOP 4-pin				100 mA	G3VM-61VY1	125 pcs.	G3VM-61VY1(TR)	3000 pcs.
				500 mA	G3VM-61VY2		G3VM-61VY2(TR05)	500 pcs.
				700 mA	G3VM-61VY3		G3VM-61VY2(TR)	3000 pcs.
SOP4	1b (SPST-NC)		500 mA	G3VM-63G	100 pcs.	G3VM-61VY3(TR05)	3000 pcs.	
						G3VM-63G(TR05)	500 pcs.	

* The AC peak and DC value are given for the load voltage and continuous load current.

Note: To order tape packaging for Relays with surface-mounting terminals, add "(TR)" or "(TR05)" to the end of the model number.

Absolute Maximum Ratings (Ta = 25°C)


Item	Symbol	G3VM-61G2	G3VM-61G3	G3VM-61VY1	G3VM-61VY2	G3VM-61VY3	G3VM-63G	Unit	Measurement conditions	
Input	LED forward current	If	50	30			50	mA		
	LED forward current reduction rate	$\Delta I_f/^\circ C$	-0.5	-0.3			-0.5	mA/°C	Ta ≥ 25°C	
	LED reverse voltage	V _R	5			6		5	V	
	Connection temperature	T _J	125						°C	
Output	Load voltage (AC peak/DC)	V _{OFF}	60						V	
	Continuous load current (AC peak/DC)	I _o	400	100	500	700	500	mA		
	ON current reduction rate	$\Delta I_o/^\circ C$	-4.0	-1.0	-5.0	-7.0	-5.0	mA/°C	Ta ≥ 25°C	
	Pulse ON current	I _{op}	1200	300	1500	2100	1500	mA	t=100 ms, Duty=1/10	
	Connection temperature	T _J	125						°C	
	Dielectric strength between I/O *	V _{I-O}	1500		3750			1500	V _{rms}	AC for 1 min
Ambient operating temperature	T _a	-40 to +85			-40 to +110		-40 to +105	°C	With no icing or condensation	
Ambient storage temperature	T _{stg}	-55 to +125						°C		
Soldering temperature	-	260						°C	10 s	

* The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

■Electrical Characteristics (Ta = 25°C)

Item		Symbol	G3VM-61G2	G3VM-61G3	G3VM-61VY1	G3VM-61VY2	G3VM-61VY3	G3VM-63G	Unit	Measurement conditions	
Input	LED forward voltage	V _F	Minimum	1.0	1.1			1.0	V	I _F =10 mA	
			Typical	1.15	1.27			1.15			
			Maximum	1.3	1.4			1.3			
	Reverse current	I _R	Maximum	10						μA	V _R =5 V
	Capacitance between terminals	C _T	Typical	30		50	30			pF	V=0, f=1 MHz
Trigger LED forward current	I _{FT} (I _{FC}) *2	Typical	0.4	–	0.2	1		0.6	mA	G3VM-61G2/61G3: I _o =400 mA G3VM-61VY1 : I _o =100 mA G3VM-61VY2 : I _o =500 mA G3VM-61VY3 : I _o =700 mA G3VM-63G : I _{OFF} =10 μA	
		Maximum	1	0.2	1	3					
Release LED forward current	I _{FC} (I _{FT}) *2	Minimum	0.1	–	0.01	0.1			mA	G3VM-61G2/61G3/61VY1/ 61VY2/61VY3 : I _{OFF} =100 μA G3VM-63G : I _o =500 mA	
		Typical	–	0.001	–	0.5	–				
Output	Maximum resistance with output ON	R _{ON}	Typical	1		25	1	0.15	1	Ω	G3VM-61G2 : I _F =2 mA, I _o =400 mA G3VM-61G3 : I _F =0.5 mA, I _o =400 mA, t<1s G3VM-61VY1 : I _F =2 mA, I _o =100 mA, t<1s G3VM-61VY2 : I _F =5 mA, I _o =500 mA G3VM-61VY3 : I _F =5 mA, I _o =700 mA G3VM-63G : I _o =500 mA
			Maximum	2		50	2		2.5		
	Current leakage when the relay is open	I _{LEAK}	Typical	1		–	0.1	2	–	nA	V _{OFF} =60 V
Capacitance between terminals	C _{OFF}	Typical	130		10	20	100		pF	G3VM-61G2/61G3/61VY1/61VY2/ 61VY3 : V=0, f=1 MHz G3VM-63G : V=0, f=1 MHz, I _F =5 mA	
			130		10	20	100				
Capacitance between I/O terminals	C _{I-O}	Typical	0.8						pF	f=1 MHz, V _s =0 V	
Insulation resistance between I/O terminals	R _{I-O}	Minimum	1000						MΩ	V _{I-O} =500 VDC, R _{oH} ≤60%	
		Typical	10 ⁸								
Turn-ON time	t _{ON}	Typical	3	3.5	1	0.6	2	0.3	ms	G3VM-61G2 : I _F =2 mA, R _L =200 Ω, V _{DD} =20 V *1 G3VM-61G3 : I _F =0.5 mA, R _L =200 Ω, V _{DD} =20 V *1 G3VM-61VY1 : I _F =2 mA, R _L =200 Ω, V _{DD} =10 V *1 G3VM-61VY2/61VY3: I _F =5 mA, R _L =200 Ω, V _{DD} =20 V *1 G3VM-63G : I _F =5 mA, R _L =200 Ω, V _{DD} =20 V *1	
		Maximum	8	10	5	2	3	1			
Turn-OFF time	t _{OFF}	Typical	1		0.1		0.7		ms	G3VM-61G2 : I _F =2 mA, R _L =200 Ω, V _{DD} =20 V *1 G3VM-61G3 : I _F =0.5 mA, R _L =200 Ω, V _{DD} =20 V *1 G3VM-61VY1 : I _F =2 mA, R _L =200 Ω, V _{DD} =10 V *1 G3VM-61VY2/61VY3: I _F =5 mA, R _L =200 Ω, V _{DD} =20 V *1 G3VM-63G : I _F =5 mA, R _L =200 Ω, V _{DD} =20 V *1	
		Maximum	3	5	0.5		3				

*1. Turn-ON and Turn-OFF Times

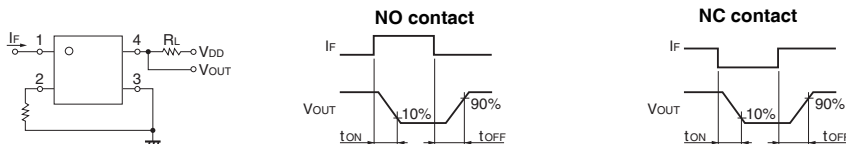

*2. These values are for Relays with NC contacts

■Recommended Operating Conditions

For usage with high reliability, Recommended Operation Conditions is a measure that takes into account the derating of Absolute Maximum Ratings and Electrical Characteristics.

Each item on this list is an independent condition, so it is not simultaneously satisfy several conditions.

Item	Symbol	Symbol	G3VM-61G2	G3VM-61G3	G3VM-61VY1	G3VM-61VY2	G3VM-61VY3	G3VM-63G	Unit	
Load voltage (AC peak/DC)	V _{DD}	Maximum	48							V
Operating LED forward current	I _F	Minimum	–		2	5			mA	
		Typical	2	0.5	5	7.5		–		
		Maximum	25		15	25				
Continuous load current (AC peak/DC)	I _o	Maximum	320		80	500	700	500		
Ambient operating temperature	T _a	Minimum	–20							°C
		Maximum	65		100		85			


■Spacing and Insulation

Item	G3VM-6□G□	G3VM-61VY□	Unit
	Minimum		
Creepage distances	4.0	5.0	mm
Clearance distances	4.0	5.0	
Internal isolation thickness	0.1	0.2	


SOP G3VM-6□G□/61VY□

Engineering Data


LED forward current vs. Ambient temperature

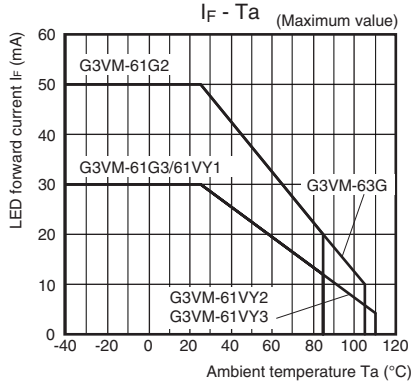


Continuous load current vs. Ambient temperature

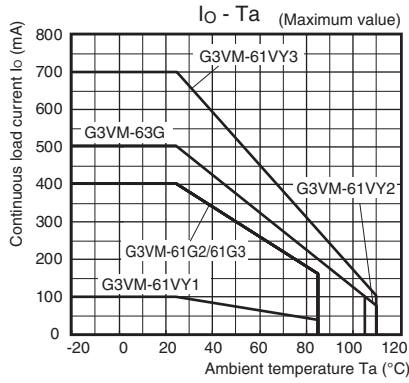


LED forward current vs. LED forward voltage

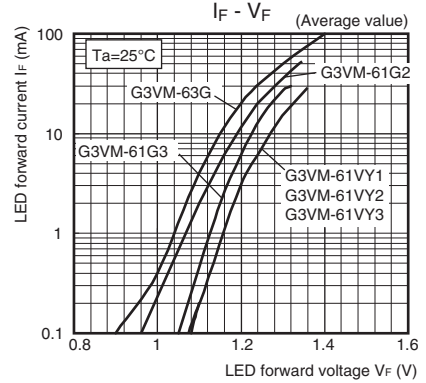


Continuous load current vs. On-state voltage

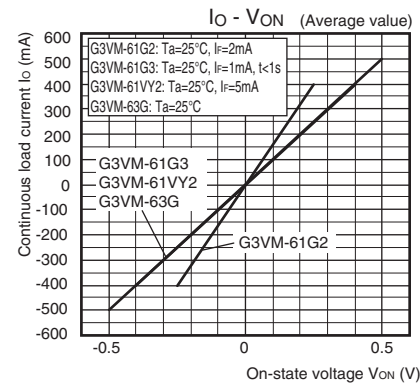


G3VM-61VY1

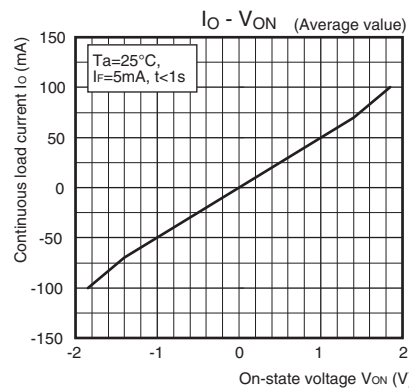


G3VM-61VY3

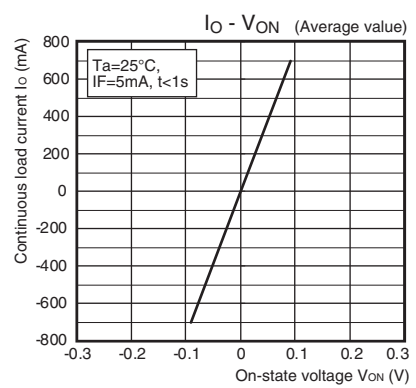


On-state resistance vs. Ambient temperature

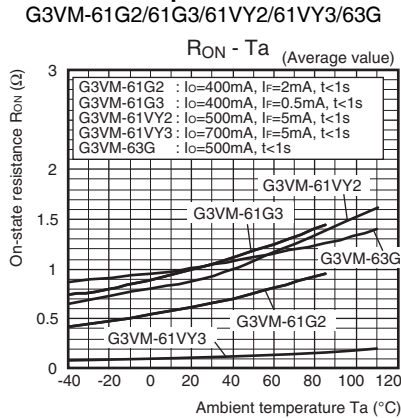


G3VM-61VY1

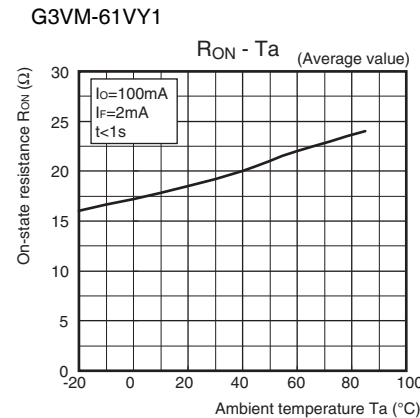


Trigger LED forward current vs. Ambient temperature

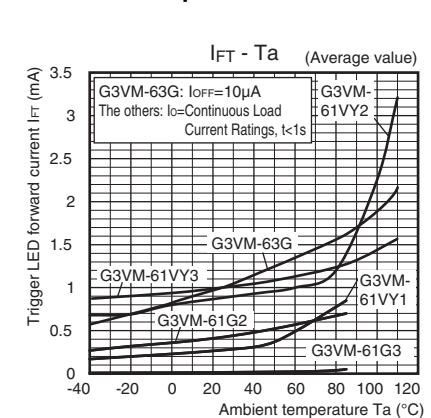


Turn ON, Turn OFF time vs. LED forward current

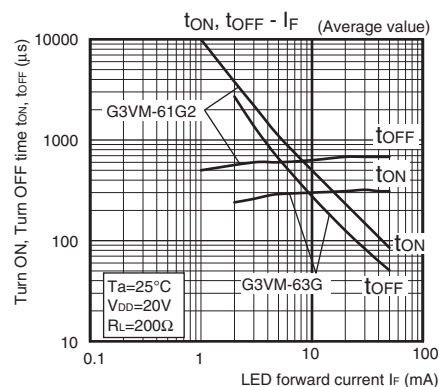

G3VM-61G3/61VY1/61VY2

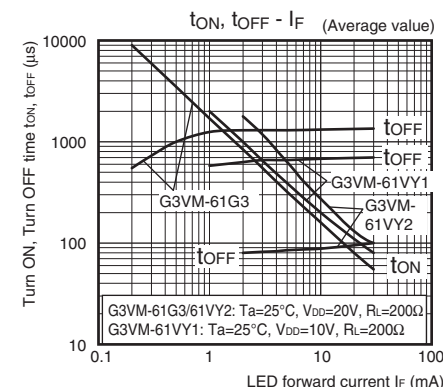


G3VM-61VY3

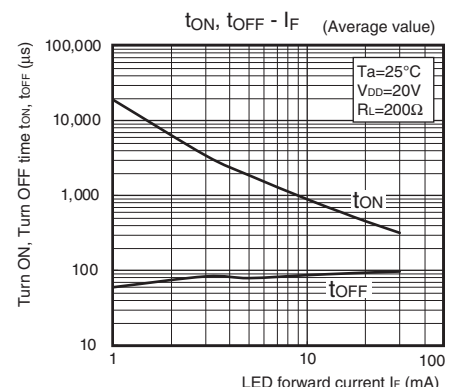


Engineering Data

● Turn ON, Turn OFF time vs. Ambient temperature


G3VM-61G2/61VY2/61VY3/63G

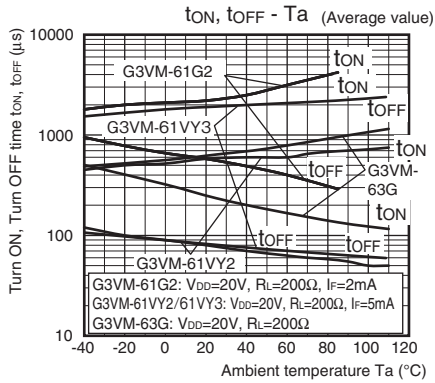

G3VM-61G3/61VY1

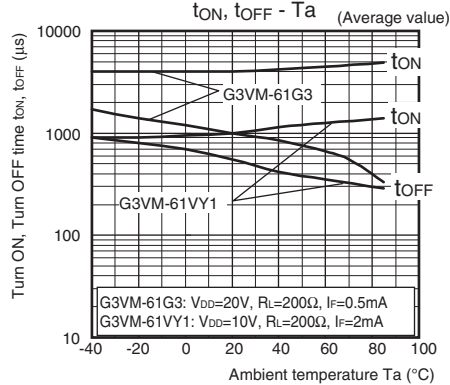


● Current leakage vs. Ambient temperature

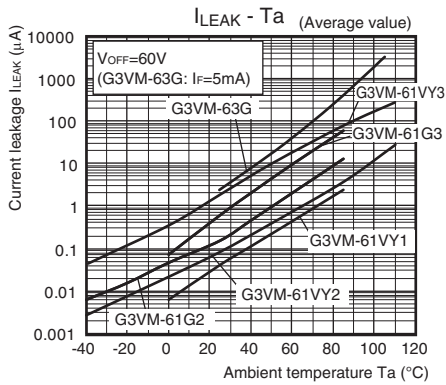


● Current leakage vs. Load voltage

G3VM-61G3/61VY1

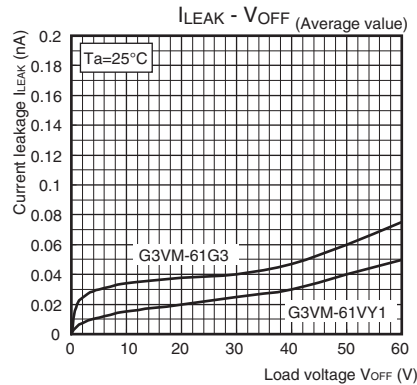

G3VM-61VY3

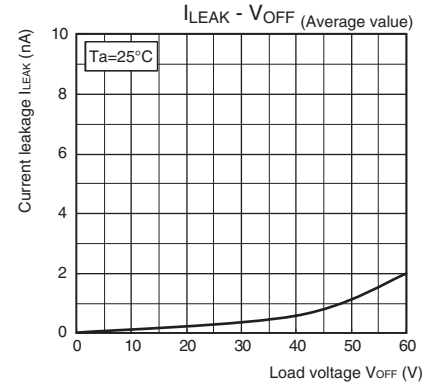


Appearance/Terminal Arrangement/Internal Connections


● Appearance

SOP (Small Outline Package)

SOP 4-pin

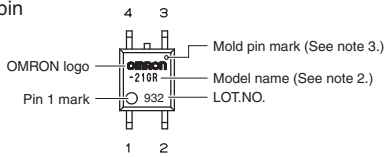


Special SOP 4-pin (G3VM-61VY1/61VY2/61VY3)




- Note: 1.** The actual product is marked differently from the image shown here.
- Note: 2.** "G3VM" does not appear in the model number on the Relay.
- Note: 3.** The indentation in the corner diagonally opposite from the pin 1 mark is from a pin on the mold.

● Terminal Arrangement/Internal Connections (Top View)

G3VM-61G2/61G3/61VY1/61VY2/61VY3



G3VM-63G



■ Dimensions (Unit: mm)


SOP (Small Outline Package)

SOP 4-pin




Surface-mounting Terminals

Weight: 0.1 g

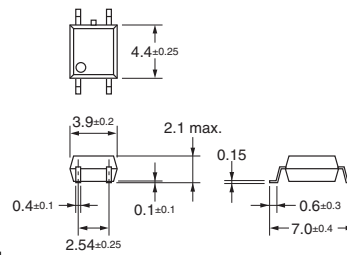


Actual Mounting Pad Dimensions

(Recommended Value, Top View)




Note: The actual product is marked differently from the image shown here.

Special SOP 4-pin *(G3VM-61VY1/61VY2/61VY3)




Surface-mounting Terminals

Weight: 0.1 g



Actual Mounting Pad Dimensions

(Recommended Value, Top View)



* The external dimensions are different from those of the standard SOP 4-pin, but the mounting pad dimensions are the same.

Note: The actual product is marked differently from the image shown here.

■ Approved Standards

UL recognized

Model	Approved Standards	Contact form	File No.
G3VM-61G2 G3VM-61G3 G3VM-61VY1 G3VM-61VY2 G3VM-61VY3	UL recognized	1a (SPST-NO)	E80555
G3VM-63G		1b (SPST-NC)	

■ Safety Precautions

- Refer to the *Common Precautions for All MOS FET Relays* for precautions that apply to all MOS FET Relays.

Please check each region's Terms & Conditions by region website.

OMRON Corporation

Device & Module Solutions Company

Regional Contact

Americas

<https://components.omron.com/us>

Asia-Pacific

<https://components.omron.com/ap>

Korea

<https://components.omron.com/kr>

Europe

<https://components.omron.com/eu>

China

<https://components.omron.com.cn>

Japan

<https://components.omron.com/jp>