


A6E-N

Slide DIP Switch



Box type Through-hole Mounting DIP Switch

- Gold-plated twin contacts ensure high reliability.
- Available both ON and OFF-set soldering.

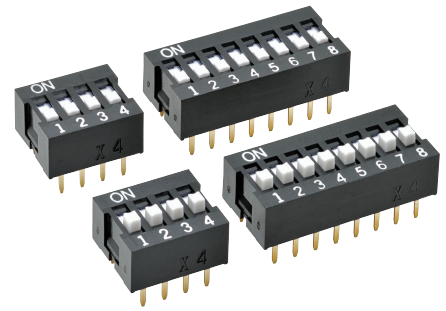

List of Models

● Tube Packaging

Type		Flat actuator	Raised actuator
Appearance			
No. of poles	Quantity per tube		
2	72	A6E-2101-N	A6E-2104-N
3	51	A6E-3101-N	A6E-3104-N
4	40	A6E-4101-N	A6E-4104-N
5	32	A6E-5101-N	A6E-5104-N
6	27	A6E-6101-N	A6E-6104-N
7	24	A6E-7101-N	A6E-7104-N
8	21	A6E-8101-N	A6E-8104-N
9	19	A6E-9101-N	A6E-9104-N
10	17	A6E-0101-N	A6E-0104-N



Note: Order in multiples of the package quantity.

Ratings / Characteristics



Ratings(resistive load)	25 mA at 24 VDC 10 μ A (minimum current) at 3.5 VDC	
Ambient operating temperature	-20 to +70°C at 60% max. (with no icing or condensation)	
Ambient operating humidity	35% to 95% (at +5 to +35°C)	
Insulation resistance	100 M Ω min. (at 250 VDC with insulation tester)	
Contact resistance (initial value)	200 m Ω max. (initial value)	
Dielectric strength	Between terminals 500 VAC for 1 min	
Vibration resistance	Malfunction	10 to 55 Hz, 1.5-mm double amplitude
Shock resistance	Malfunction	300 m/s ² min.
Durability	1,000 operations min.	
Washing	Not possible	
Degree of protection	IEC IP40	
Operating force	0.29 to 9.8 N	
Weight	Raised actuator: 0.43 g (2 poles) 0.78 g (4 poles) 1.12 g (6 poles) 1.47 g (8 poles) 1.82 g (10 poles)	

Dimensions (Unit: mm)


● Flat Actuator A6E-□101-N

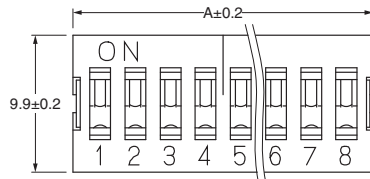


● Raised Actuator A6E-□104-N

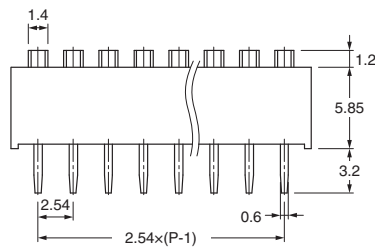


Flat Actuator



Raised Actuator



PCB Dimensions (Reference) (Top View)




No. of poles	Model		Dimension A
	Flat	Raised	
2	A6E-2101-N	A6E-2104-N	6.44
3	A6E-3101-N	A6E-3104-N	8.98
4	A6E-4101-N	A6E-4104-N	11.52
5	A6E-5101-N	A6E-5104-N	14.06
6	A6E-6101-N	A6E-6104-N	16.60
7	A6E-7101-N	A6E-7104-N	19.14
8	A6E-8101-N	A6E-8104-N	21.68
9	A6E-9101-N	A6E-9104-N	24.22
10	A6E-0101-N	A6E-0104-N	26.76

Note: Unless otherwise specified, a tolerance of ± 0.4 mm applies to all dimensions.

Internal Connections

Contact Form (Top View)



Safety Precautions

★ Be sure to read the Safety precautions common to all DIP Switches for correct use.

Please check each region's Terms & Conditions by region website.

OMRON Corporation

Device & Module Solutions Company

Regional Contact

Americas

<https://components.omron.com/us>

Asia-Pacific

<https://components.omron.com/ap>

Korea

<https://components.omron.com/kr>

Europe

<https://components.omron.com/eu>

China

<https://components.omron.com.cn>

Japan

<https://components.omron.com/jp>