


# G3VM-41QR10/61QR

MOS FET Relays S-VSON 4-pin, Low-output-capacitance and Low-ON-resistance Type (with Low C × R)

## World's smallest class \* New S-VSON Package with Low Output Capacitance and Low ON Resistance

- Load voltage: 40 V / 60 V.
- G3VM-41QR10: Low C × R = 4.95 pF·Ω, C<sub>OFF</sub> (standard) = 0.45 pF, R<sub>ON</sub> (standard) = 11 Ω
- G3VM-61QR: Low C × R = 13.2 pF·Ω, C<sub>OFF</sub> (standard) = 12 pF, R<sub>ON</sub> (standard) = 1.1 Ω
- High Ambient operating temperature: -40°C to +110°C

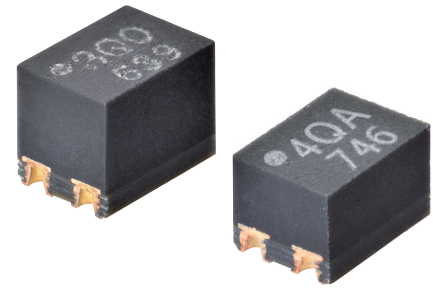

**NEW**


Note: The actual product is marked differently from the image shown here.

\* As of March 2018 Survey by OMRON.

### Application Examples

- Semiconductor test equipment
- Test & measurement equipment
- Communication equipment
- Data loggers

### Package (Unit: mm, Average)

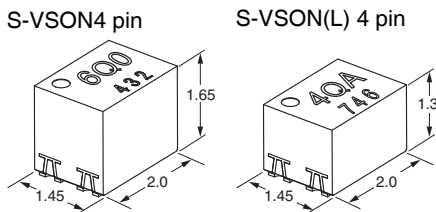

Note: The actual product is marked differently from the image shown here.

### Model Number Legend

G3VM-□□□□□  
1 2 3 4 5

#### 1. Load Voltage

- 4: 40V
- 6: 60 V

#### 4. Additional functions

- R: Low On-resistance

#### 2. Contact form Package type

- 1: 1a (SPST-NO)

#### 5. Other informations

When specifications overlap, serial code is added in the recorded order.

#### 3. Package type

- Q: S-VSON 4 pin
- S-VSON(L)\* 4 pin
- \* (L): Low profile type

### Ordering Information

Package type	Contact form	Terminals	Load voltage (peak value) *	Continuous load current (peak value) *	Packing/Tape cut		Packing/Tape & reel	
					Model	Minimum package quantity	Model	Minimum package quantity
S-VSON4(L)4	1a (SPST-NO)	Surface-mounting Terminals	40 V	120 mA	G3VM-41QR10	1 pc.	G3VM-41QR10 (TR05)	500 pcs.
S-VSON4			60 V	400 mA	G3VM-61QR		G3VM-61QR (TR05)	

\* The AC peak and DC value are given for the load voltage and continuous load current.

Note: When ordering tape packing, add "(TR05)" (500 pcs/reel) to the model number.

Ask your OMRON representative for orders under 500 pcs. We can supply products with the tape already cut.

Tape-cut S-VSON is packaged without humidity resistance. Use manual soldering to mount them.

Refer to common precautions.

G3VM-41QR10/61QR

S-VSON

## Absolute Maximum Ratings (Ta = 25°C)



Item		Symbol	G3VM-41QR10	G3VM-61QR	Unit	Measurement conditions
Input	LED forward current	$I_F$	30		mA	
	LED forward current reduction rate	$\Delta I_F/^\circ\text{C}$	-0.3		mA/°C	Ta ≥ 25°C
	LED reverse voltage	$V_R$	6		V	
	Connection temperature	$T_J$	125		°C	
Output	Load voltage (AC peak/DC)	$V_{OFF}$	40	60	V	
	Continuous load current (AC peak/DC)	$I_O$	120	400	mA	
	ON current reduction rate	$\Delta I_O/^\circ\text{C}$	-1.2	-4	mA/°C	Ta ≥ 25°C
	Pulse ON current	$I_{OP}$	0.36	1.2	A	t = 100 ms, Duty = 1/10
	Connection temperature	$T_J$	125		°C	
Dielectric strength between I/O *		$V_{I-O}$	500		Vrms	AC for 1 min
Ambient operating temperature		$T_a$	-40 to +110		°C	With no icing or condensation
Ambient storage temperature		$T_{stg}$	-40 to +125		°C	
Soldering temperature		-	260		°C	10 s

\* The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

## Electrical Characteristics (Ta = 25°C)

Item		Symbol	G3VM-41QR10	G3VM-61QR	Unit	Measurement conditions	
Input	LED forward voltage	$V_F$	Minimum	1.1		V	$I_F = 10 \text{ mA}$
			Typical	1.21			
			Maximum	1.4			
	Reverse current	$I_R$	Maximum	10		$\mu\text{A}$	$V_R = 5 \text{ V}$
	Capacity between terminals	$C_T$	Typical	30		pF	$V = 0, f = 1 \text{ MHz}$
	Trigger LED forward current	$I_{FT}$	Typical	0.8	-	mA	$I_O = 100 \text{ mA}$
Maximum			3				
Release LED forward current	$I_{FC}$	Minimum	0.1		mA	$I_{OFF} = 10 \mu\text{A}$	
Output	Maximum resistance with output ON	$R_{ON}$	Typical	11	1.1	$\Omega$	G3VM-41QR10: $I_F = 5 \text{ mA}$ , $t < 1 \text{ s}$ , $I_O = 120 \text{ mA}$ G3VM-61QR: $I_F = 5 \text{ mA}$ , $t < 1 \text{ s}$ , $I_O = 400 \text{ mA}$
			Maximum	14	1.5		
	Current leakage when the relay is open	$I_{LEAK}$	Maximum	1	1000 (1)	nA	G3VM-41QR10: $V_{OFF} = 40 \text{ V}$ G3VM-61QR: $V_{OFF} = 60 \text{ V}$ ( $V_{OFF} = 50 \text{ V}$ )
Capacity between terminals	$C_{off}$	Typical	0.45	12	pF	$V = 0, f = 100 \text{ MHz}, t < 1 \text{ s}$	
		Maximum	0.8	20			
Capacity between I/O terminals	$C_{I-O}$	Typical	1	0.9	pF	$f = 1 \text{ MHz}, V_s = 0 \text{ V}$	
Insulation resistance between I/O terminals	$R_{I-O}$	Typical	$10^8$		M $\Omega$	$V_{I-O} = 500 \text{ VDC}, \text{RoH} \leq 60\%$	
Turn-ON time	$t_{ON}$	Typical	0.08	-	ms	$I_F = 5 \text{ mA}, R_L = 200 \Omega, V_{DD} = 20 \text{ V}$ ( $I_F = 10 \text{ mA}, R_L = 200 \Omega, V_{DD} = 20 \text{ V}$ ) *	
		Maximum	0.2	0.5 (0.25)			
Turn-OFF time	$t_{OFF}$	Typical	0.04	-	ms		
		Maximum	0.3	0.3 (0.3)			

\* Turn-ON and Turn-OFF Times



## Recommended Operating Conditions


For usage with high reliability, Recommended Operation Conditions is a measure that takes into account the derating of Absolute Maximum Ratings and Electrical Characteristics.

Each item on this list is an independent condition, so it is not simultaneously satisfy several conditions.


Item	Symbol		G3VM-41QR10	G3VM-61QR	Unit
Load voltage (AC peak/DC)	$V_{DD}$	Maximum	32	48	V
Operating LED forward current	$I_F$	Minimum	5		mA
		Typical	7.5		
		Maximum	20		
Continuous load current (AC peak/DC)	$I_O$	Maximum	120	400	
Ambient operating temperature	$T_a$	Minimum	-20		°C
		Maximum	85	100	

## Engineering Data


### LED forward current vs. Ambient temperature

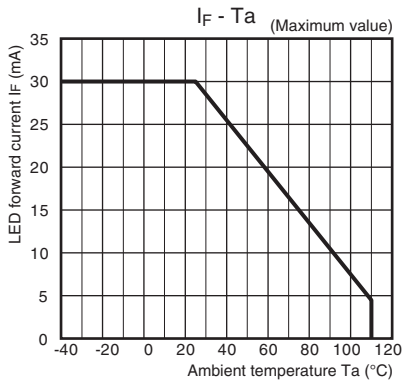


### Continuous load current vs. Ambient temperature

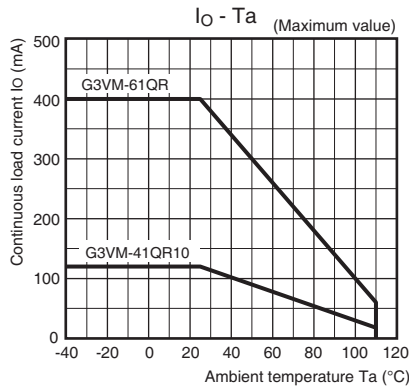


### LED forward current vs. LED forward voltage

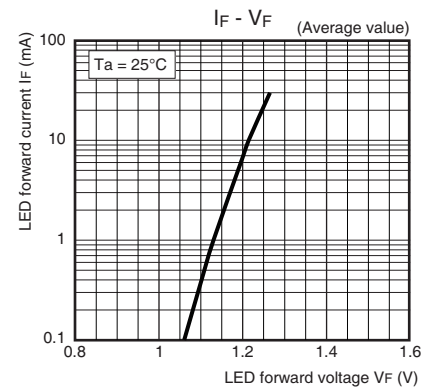


### Continuous load current vs. On-state voltage

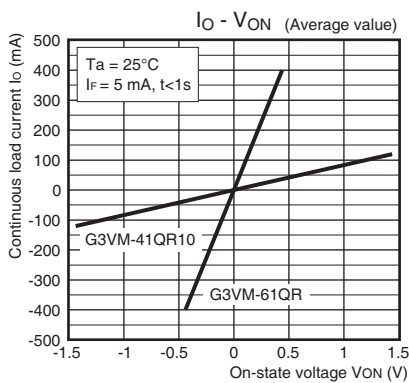


### On-state resistance vs. Ambient temperature

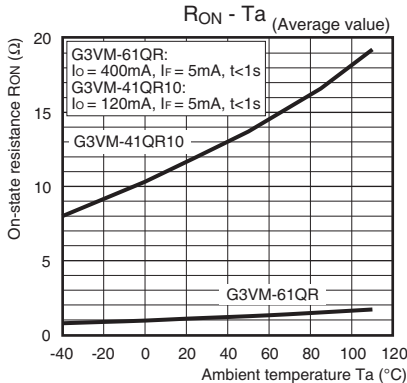


### Trigger LED forward current vs. Ambient temperature

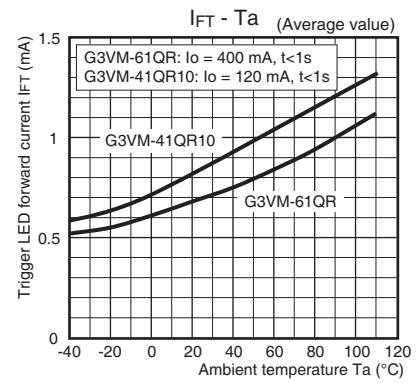


### Turn ON, Turn OFF time vs. LED forward current

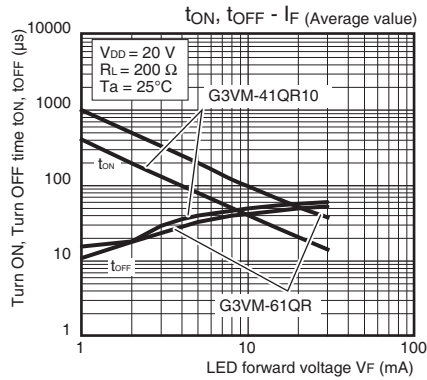


### Turn ON, Turn OFF time vs. Ambient temperature

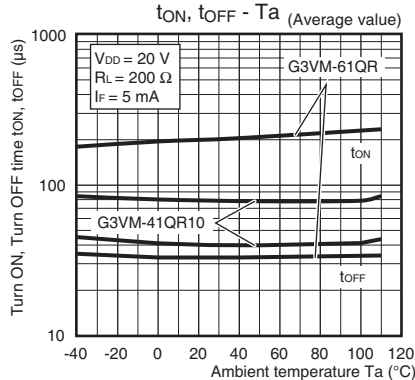


### Current leakage vs. Load voltage

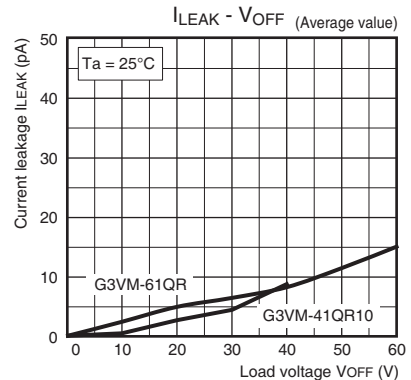

### Current leakage vs. Ambient temperature

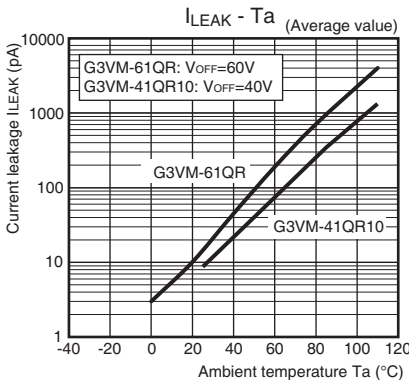

### Output terminal capacitance vs. Load voltage

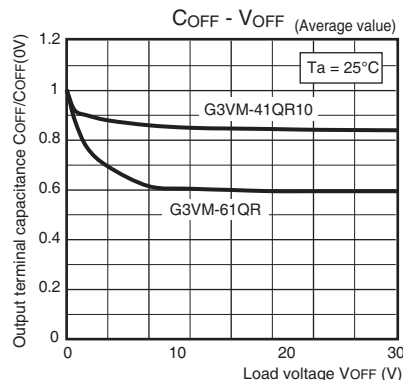


## ■ Appearance / Terminal Arrangement / Internal Connections

### ■ Appearance

#### S-VSON (Super-Very Small Outline Non-leaded)


S-VSON4 pin / S-VSON(L)4 pin



\* Actual model name marking for each model

Model	Marking
G3VM-41QR10	4QA
G3VM-61QR	6Q0

### ■ Terminal Arrangement/Internal Connections (Top View)



Note 1. The actual product is marked differently from the image shown here.  
2. "G3VM" does not appear in the model number on the Relay.



### ■ Dimensions (Unit: mm)

#### S-VSON (Super-Very Small Outline Non-leaded)

S-VSON4 pin


##### Surface-mounting Terminals

Weight: 0.01 g

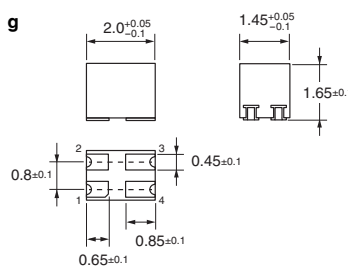

#### Actual Mounting Pad Dimensions

(Recommended Value, Top View)

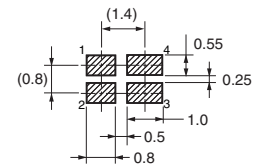



Unless otherwise specified, the dimensional tolerance is ± 0.1 mm.

Note: The actual product is marked differently from the image shown here.

S-VSON(L)4 pin


##### Surface-mounting Terminals

Weight: 0.01 g

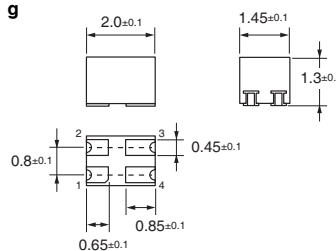

#### Actual Mounting Pad Dimensions

(Recommended Value, Top View)

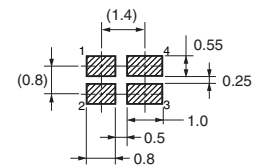

Unless otherwise specified, the dimensional tolerance is ± 0.1 mm.

Note: The actual product is marked differently from the image shown here.

### ■ Safety Precautions

- Refer to "Common Precautions" for all G3VM models.

Please check each region's Terms & Conditions by region website.

## OMRON Corporation

Device & Module Solutions Company

### Regional Contact

#### Americas

<https://components.omron.com/us>

#### Asia-Pacific

<https://components.omron.com/ap>

#### Korea

<https://components.omron.com/kr>

#### Europe

<https://components.omron.com/eu>

#### China

<https://components.omron.com.cn>

#### Japan

<https://components.omron.com/jp>

© OMRON Corporation 2017-2022 All Rights Reserved.  
In the interest of product improvement, specifications are subject to change without notice.

Cat. No. K291-E1-06  
1122 (0717)