M2D

Indicator (Cylindrical 8-dia.)

Cylindrical 8-dia. Indicator

- Same basic design as the A3D Pushbutton Switch.
- Excellent illumination with even surface brightness.
- Cylindrical body means panel cutouts can be made easily.





Refer to Safety Precautions for All Pushbutton Switches/Indicators and Safety Precautions for the A3D.


List of Models

App	Appearance		
Rectangular		M2DJ	
Square		M2DA	
Round		M2DT	

- Specifications: Refer to page 4. Dimensions: Refer to page 5. Accessories: Refer to the A3D.
- Precautions for correct use and safety precautions: Refer to the A3D.

comprises the Display (with built-in LED) and Socket Unit.

For information on combinations, refer to Ordering Information.

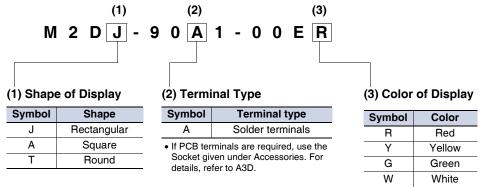

- All models are illumination only. Colored-illumination models are not available.
- An external resistor is required. For details, refer to A3D.

Ordering Information

Ordering as a Set The model numbers used to order sets of Units are given in the following table. One set comprises the Display (with built-in LED), and Socket Unit.

A	ppearance	Degree of protection	Model number	Color symbol for Display	Minimum packing unit
Rectangular	9.5 24.5	IP40	M2DJ-90A1-00E□		
Square	9.5 24.5		M2DA-90A1-00E□	R, Y, G, W	10 pcs
Round	9.5. 24.5 9 dia.		M2DT-90A1-00E□		

Note: Enter the desired color symbol for the Display in \square : R (red), Y (yellow), G (green), or W (white)

Individual models: Refer to pages 3.


(The Display and Socket Unit can be ordered separately.)

- Specifications: Refer to page 4. Dimensions: Refer to page 5.
- Accessories: Refer to pages A3D


Ordering Information

Ordering Individually........ Displays and Socket Units can be ordered separately. Combinations that are not available as sets can be created using individual Units. Also, store the parts as spares for maintenance and repairs.

Ordering: Specify a model number from the following table.







Display (with built-in LED)

Appearance	Rectangular	Square	Round	Remarks	Minimum packing unit
Red	M2DJ-500R	M2DA-500R	M2DT-500R	D () 11 40D 1 1 1	
Yellow	M2DJ-500Y	M2DA-500Y	M2DT-500Y	Refer to the A3D datasheet for information on mounting and replacement.	10 pcs
Green	M2DJ-500GY	M2DA-500GY	M2DT-500GY		
White	M2DJ-500W	M2DA-500W	M2DT-500W		

Socket Unit

Sealing	IP40			
	Rectangle	Square	Round	Minimum
Appearance				packing unit
Terminal type				
Solder terminals	M2DJ-7001	M2DA-7001	M2DT-7001	10 pcs

Ordering set combinations: Refer to page 2.

- Specifications: Refer to page 4. Dimensions: Refer to page 5.
- Accessories: Refer to pages A3D

Specifications

Ratings

Built-in LED Lamp

(Ta=25°C)

Item	Color of LED Lamp	Red	Yellow (White) *2	Green
Forward	Reference value (V) *1	1.85	2.1	2.3
voltage, VF	Maximum value (V)	2.2	2.4	2.5
Forward current, IF	Reference value (mA)	20	20	20
	Absolute maximum value (mA)	50	30	30
Permissible dissipation, PD	Absolute maximum value (mW)	110	72	75
Reverse voltage, VR	Absolute maximum value (V)	5	5	5


Note: The built-in LED lamp has no limiting resistor and so it is necessary to connect an external resistor within the range shown in the above table. For details of calculation formulas, refer to A3D.

Characteristics

Ambient operating temperature	-10°C to +55°C (with no icing or condensation)
Ambient operating humidity	35 to 85% RH
Ambient storage temperature	-25°C to +65°C (with no icing or condensation)

Nomenclature

Model Structure

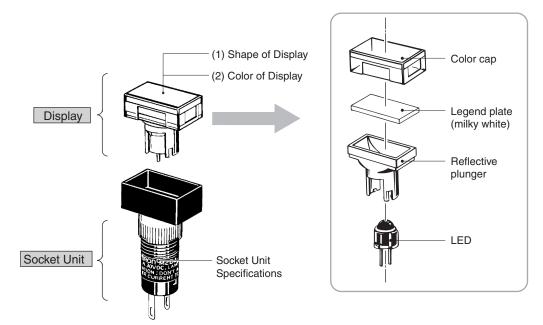

Note: The M2DJ model is shown here as a representative example.

	Туре	Specifications
(1)	Shape of Display Rectangular Square Round (M2DJ) (M2DA) (M2DT)	
(2)	LED Lamp-lighted Models Red, Yellow, Green, White	The LED lamp is built into the Display.

^{*1.} Refer to the characteristic graph of VF-IF on A3D. *2. The white Display is also used for yellow.

Accessories, Replacements, and Tools

Lighted Pushbutton Switch. Refer to the A3D datasheet.

The accessories, replacements, and tools are also used with the A3D

Dimensions (Unit: mm)

Note: Unless specified, there is a tolerance of ± 0.4 mm for dimensions.

Terminals

Type Terminals		Indicato	r
Solder Terminals	1.6	0.8 0.8	L+

Panel Cutouts (Top View)

Rectangular models (M2DJ)	Square models (M2DA) and round models (M2DT)
8 o dia 15 min 10 min.	8 °0.2 dia. 10 min.
Note: Recommended panel thickness: 1.0 to 3.2 mm.	Note: Recommended panel thickness: 1.0 to 3.2 mm.

• If the panel is to be finished (e.g., coated), make sure that the panel meets the specified dimensions after the coating.

Safety Precautions

Refer to Safety Precautions for all Pushbutton Switches/Indicators and Safety Precautions for the A3D.

N 2

Please check each region's Terms & Conditions by region website.

OMRON Corporation

Device & Module Solutions Company

Regional Contact

Americas

https://components.omron.com/us

Asia-Pacific

https://components.omron.com/ap

Korea

https://components.omron.com/kr

Europe

https://components.omron.com/eu

China

https://components.omron.com.cn

Japan

https://components.omron.com/jp

mapo..//oomponeme.ormonicom/jp

Cat. No. A122-E1-06 1122 (0207)